
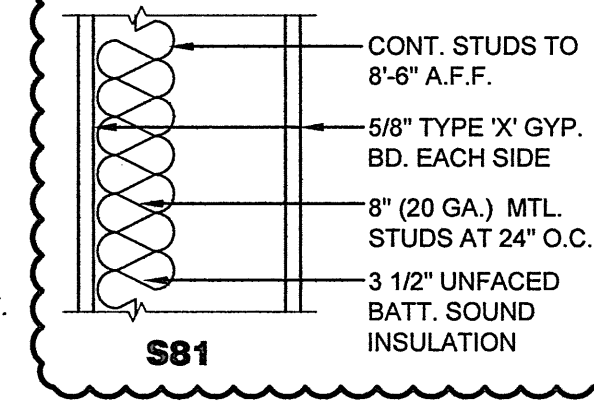
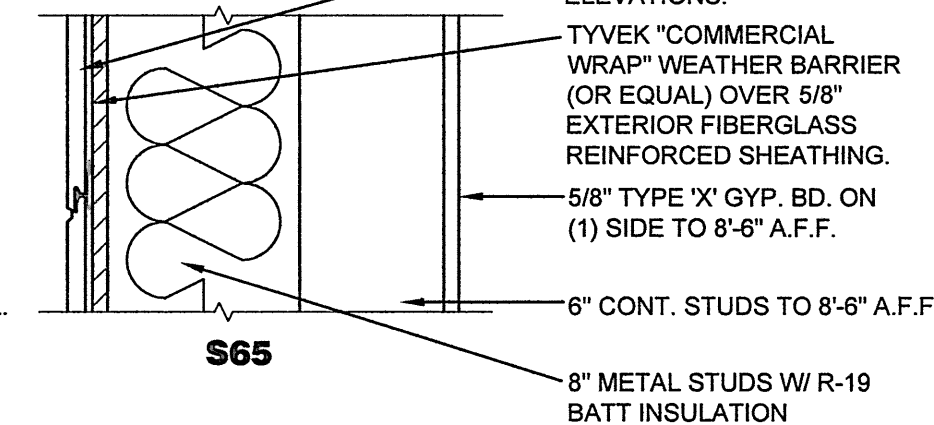
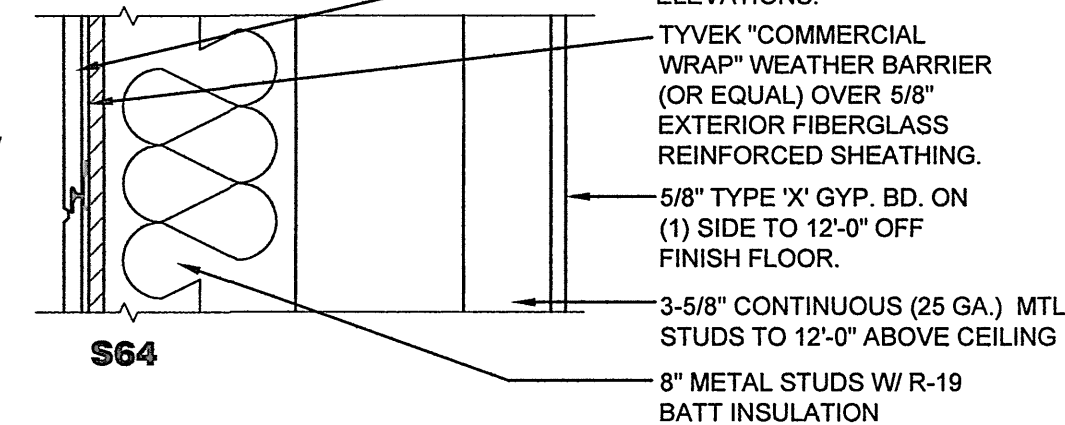
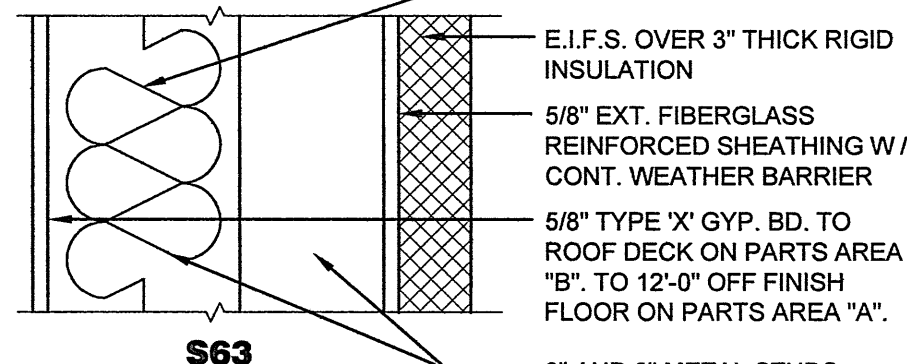
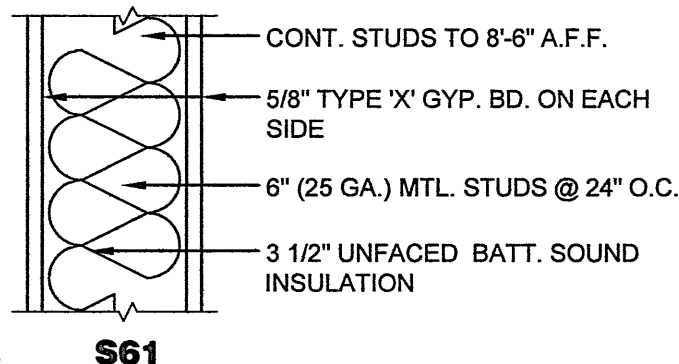
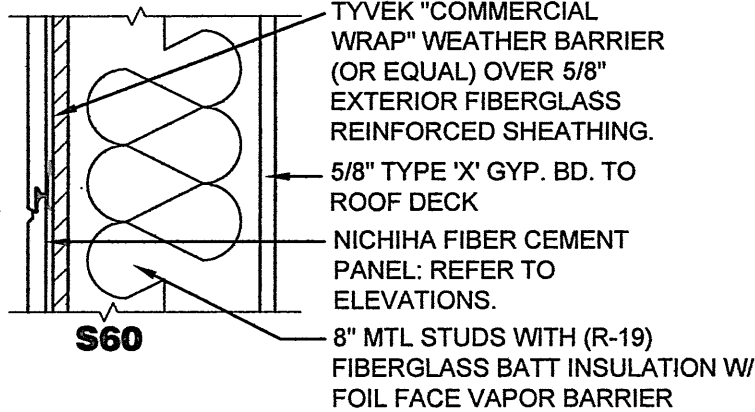



## WALL TYPES:

- PROVIDE FIRE STOPPING AND FIRE SEALANT MATERIALS AS REQUIRED AT ALL RATED WALL CONSTRUCTION MATERIAL TRANSITIONS AND PENETRATIONS. RATING TO BE EQUAL TO RATED WALL ASSEMBLY.
- PROVIDE DIAGONAL BACKING BRACING ( 3" X 16 GA. FLAT STRIP ) AT CORNER FACES OF FREE STANDING PARTITION SYSTEMS.
- PROVIDE MOISTURE RESISTANT TYPE "X" GYP. BOARD IN REST ROOMS.
- PROVIDE "J" MOLDING REGLETS OR CORNER BEAD AT ALL DISSIMILAR WALL MATERIAL TRANSITIONS.
- EXPOSED INSULATION SHALL HAVE A FLAME SPREAD RATING OF 0-25 AND A SMOKE DEVELOPMENT RATING OF 0-450. CONCEALED INSULATION SHALL HAVE A FLAME SPREAD RATING OF 0-75 AND A SMOKE DEVELOPMENT RATINGS OF 0-450.
- WHERE BOTTOM OF GYPSUM BOARD ELEVATIONS DIFFER BETWEEN WALL TYPES EXTEND GYPSUM BOARD FROM FINISH FLOOR TO FIRST STUD BEHIND OWNER SUPPLIED FIXTURES, BUT NOT LESS THAN 12".

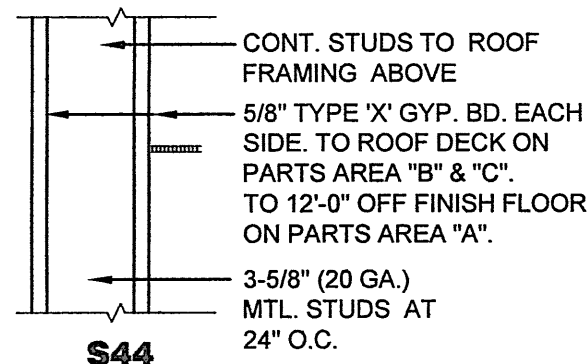




## 2 HEADER WALL SECTION

A1 SCALE: 1/2" = 1'-0"

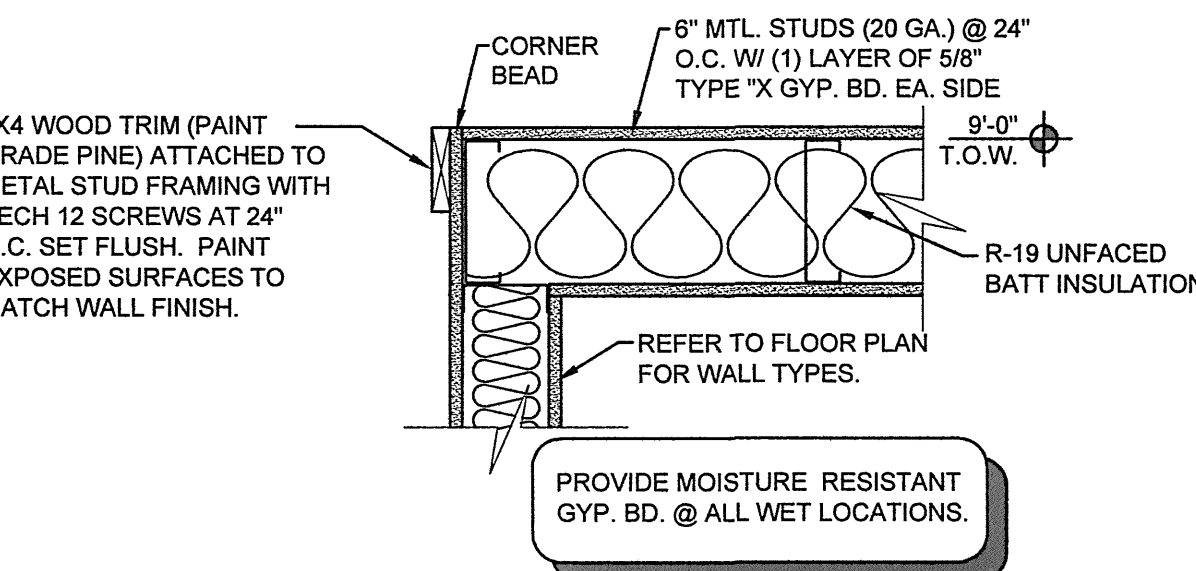

## 4 WALL / CEILING SECTION


A1 SCALE: 1-1/2" = 1'-0"

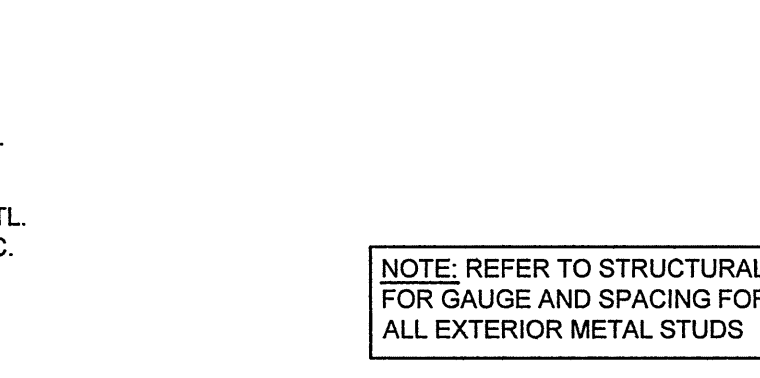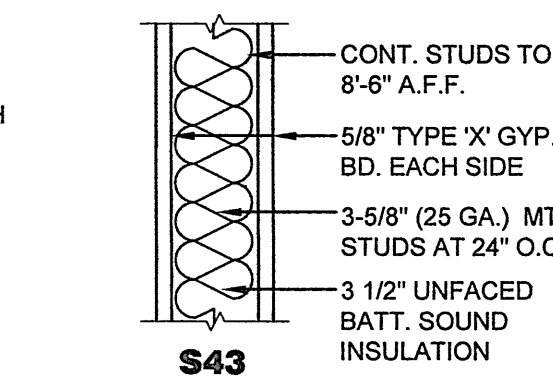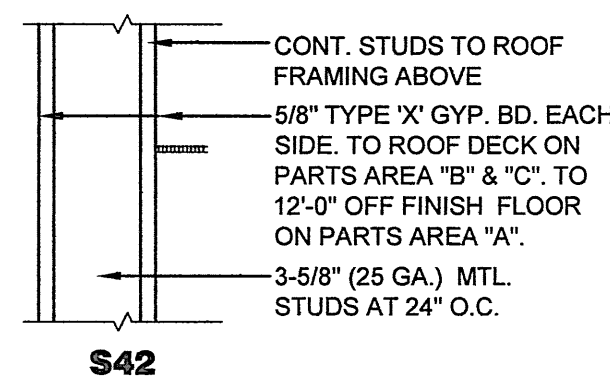

NOTE: REFER TO STRUCTURAL FOR GAUGE AND SPACING FOR ALL EXTERIOR METAL STUDS


## 3 INTERIOR WALL SECTION

A1 SCALE: 1/2" = 1'-0"

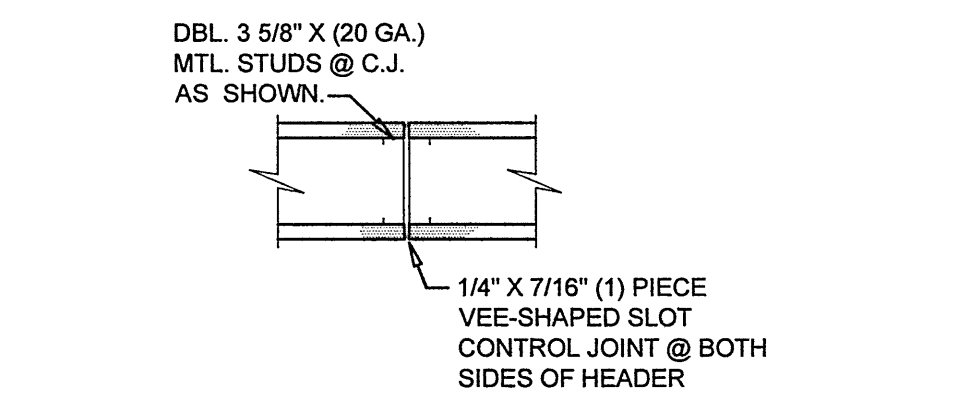


## 5 GYP. BOARD C.J.

A1 SCALE: 1-1/2" = 1'-0"

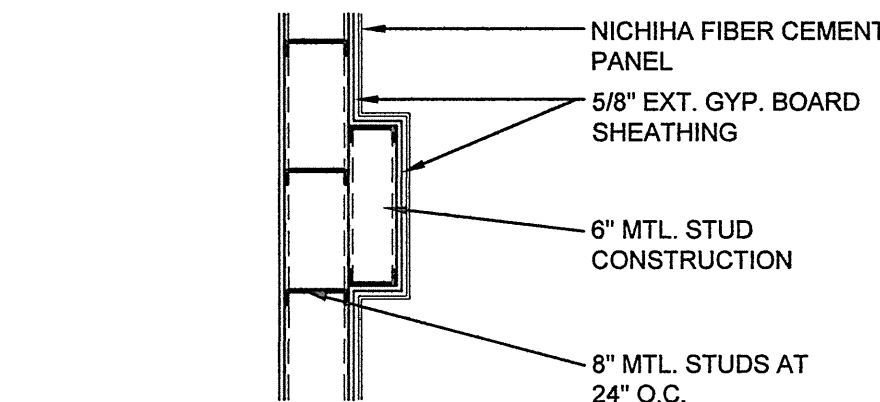


## 6 WALL PROJECTION DETAIL

A1 SCALE: 1/2" = 1'-0"

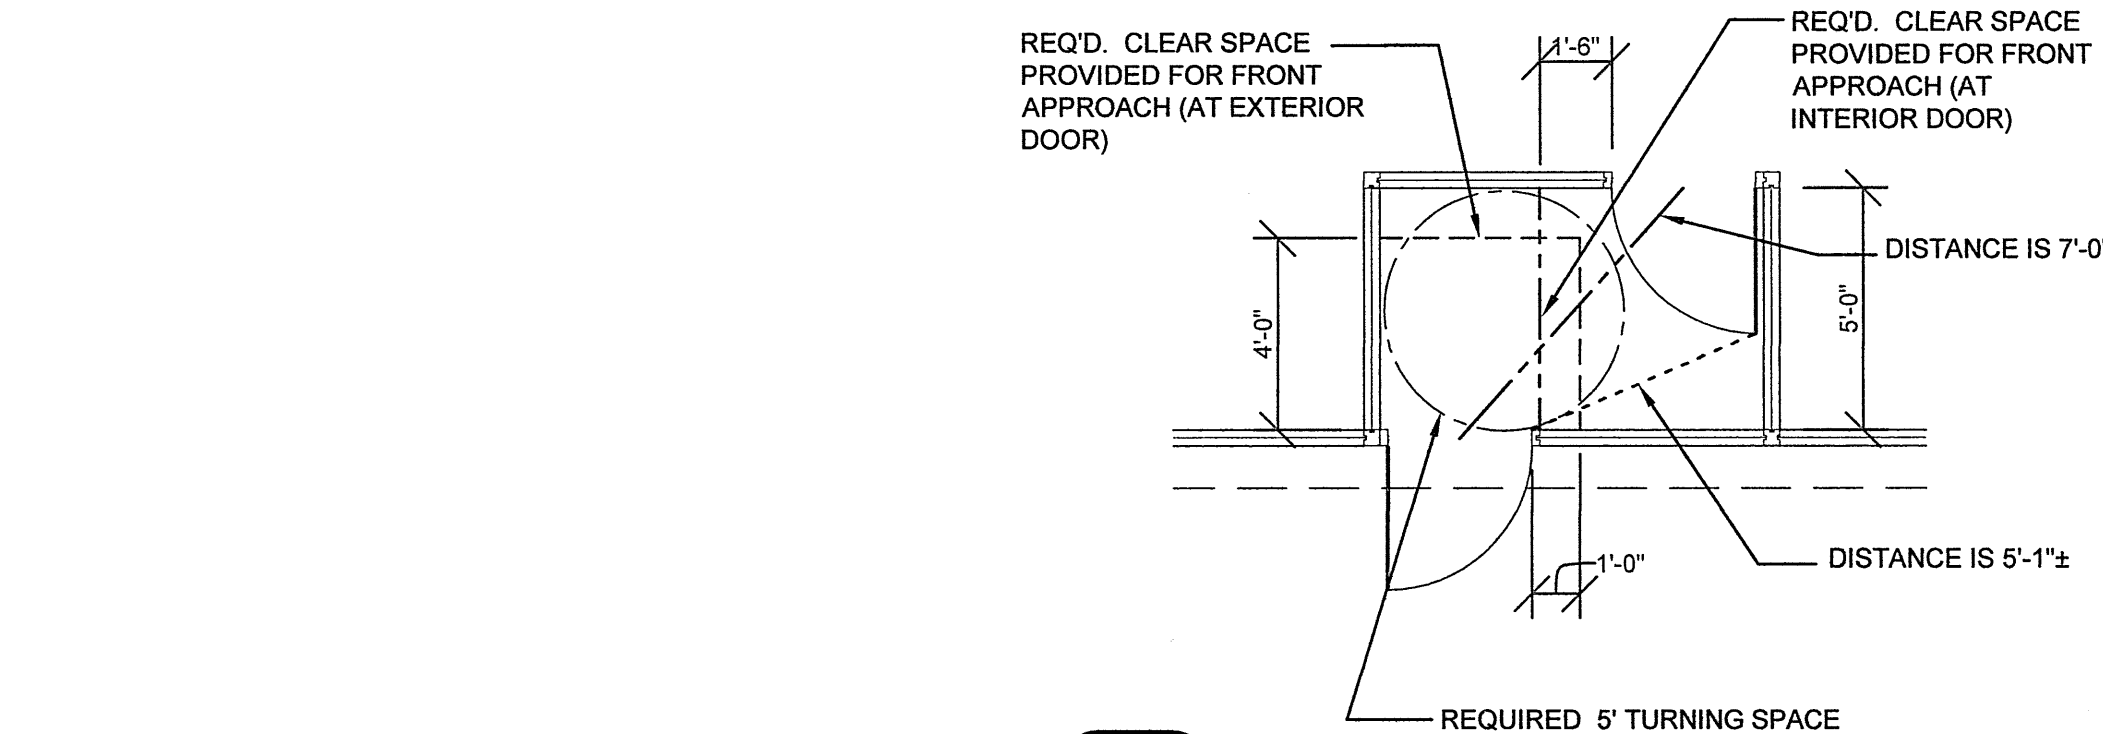

## 7 VESTIBULE DIAGRAM

A1 SCALE: 1/4" = 1'-0"

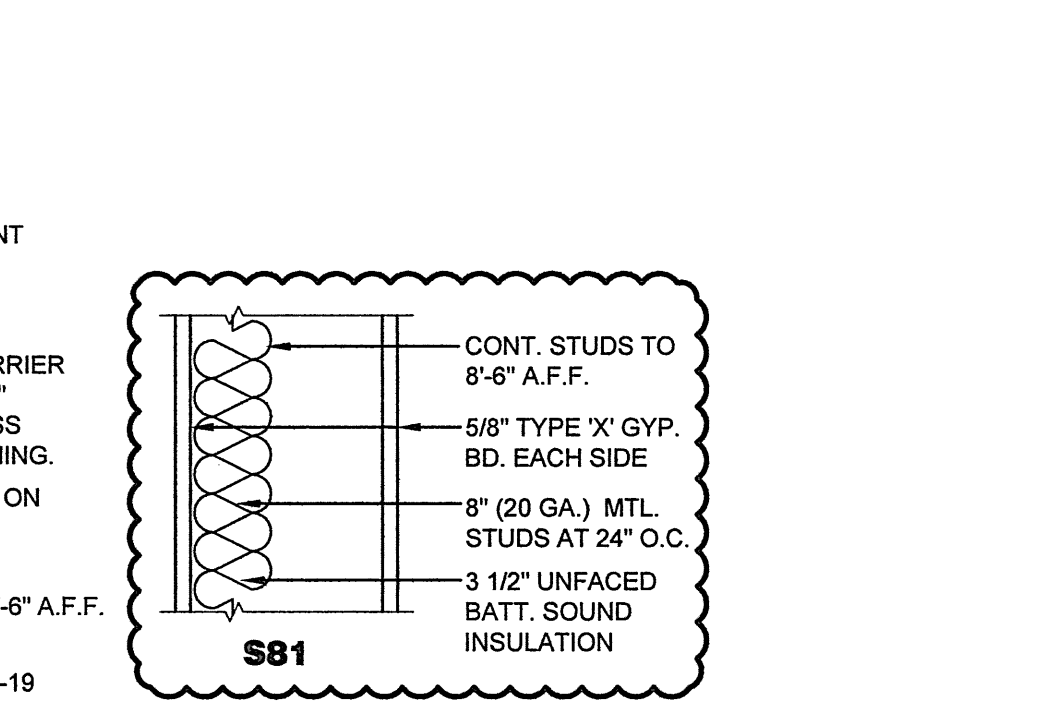

## GENERAL NOTES:

- REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.
- REFER TO COVER SHEET FOR BUILDING DESIGN CRITERIA.
- REFER TO P.E.M.B. DRAWINGS FOR ADDITIONAL REQUIREMENTS.
- ALL DIMENSIONS TO ROUGH FACE OF ROUGH FRAMING, CONCRETE OR CENTERLINE OF STRUCTURE, UNLESS OTHERWISE NOTED. 3-5/8" METAL STUD INTERIOR PARTITION DIMENSIONS NOT SHOWN FOR CLARITY.
- REFER TO SHEET F1 FOR INTERIOR FINISH REQUIREMENTS AND OWNER FURNISHED AND INSTALLED FIXTURES AND EQUIPMENT.

## KEY NOTES:

- STEEL COLUMN:**  
PER METAL BUILDING MFG.  
GC TO PROVIDE PRE-FINISHED BREAK METAL MATCHING ALUMINUM STOREFRONT FINISH AND COLOR WITH NO HORIZONTAL SEAM.
- STEEL COLUMN:**  
PAINT CUSTOM GREEN "W-4". REFER TO FINISH SCHEDULE, SHEET F1.
- FLOOR SAFE:**  
OWNER FURNISHED AND CONTRACTOR INSTALLED. SIZE TO BE VERIFIED BY OWNER. PROVIDE 18" X 18" BLOCK OUT & DO NOT INSTALL UNTIL AFTER OFFICE GYP. BD. WORK HAS BEEN COMPLETE.
- FIRE EXTINGUISHER:**  
MOUNT 42" ABOVE FINISHED FLOOR.
- SHOWROOM CORNER BOX OUT:**  
INSTALL PLYWOOD BACKING TO EACH FACE FROM 8'-0" TO 10'-0" A.F.F. FOR INSTALLATION OF SECURITY MIRRORS.

NOTE:  
G.C. TO REVIEW METAL BUILDING ERECTION DRAWINGS BEFORE CONSTRUCTION BEGINS TO CONFIRM THAT ANY ROD BRACES SHOWN IN THOSE DRAWINGS WILL NOT INTERFERE WITH CLEARANCES, ACCESSORIES OR PLUMBING FIXTURES SHOWN IN REST ROOMS. G.C. TO NOTIFY O'REILLY REPRESENTATIVE AND ARCHITECT IF THEY BELIEVE THAT THERE MIGHT BE A CONFLICT. IF THERE IS SUCH A CONFLICT, INSTALL 8" STUD WALL AGAINST EXTERIOR WALL TO ENCAPSULATE RODS (PLUMBING FIXTURES AND WALL OPPOSITE EXTERIOR WALL TO SHIFT TO ALLOW FOR THIS 8" WALL AS WELL).